

# PolyTherm® 300 - 3.4 D

Synthetic Label Facestock



PolyTherm® 300-3.4 D is a topcoated, synthetic direct thermal label facestock with high-durability and resistance properties.

## Key Features

- Lightweight, synthetic base (polypropylene film)
- High-durability
- Water resistance
- Environmental resistance
- Dark image

## Applications


- Airline baggage tags
- Retail shelf labels
- Product labeling
- Industrial labels
- Parking violations
- Ski lift tickets
- Pharmaceutical labels




## Product Characteristics

<b>Caliper</b>	3.4 ± 0.35/86.4 ± 9
<b>Basis Weight</b>	
17 x 22–500 (lbs)	16.2 ± 1.0
g/m <sup>2</sup>	60.0 ± 3.0
<b>Thermal Response - Nominal</b>	
<b>Static (°C ± 5°)</b>	
Initial 0.2 ODU	68° C
Functional 1.0 ODU	83° C
Maximum 2.52 ODU	135° C
<b>Dynamic—Atlantek 400 (mJ/mm<sup>2</sup>)</b>	
Initial 0.2 ODU	7.0
Functional 1.0 ODU	9.5
Maximum 2.5 ODU	14.6
<b>Brightness (UV Excluded)</b>	>90
<b>Gurley Stiffness Nominal (mg)</b>	MD 39 CD 53
<b>Elmendorf Tear Nominal (g)</b>	MD 33 CD 30
<b>Parker Print Surface</b>	<1.50

### Dynamic Sensitivity

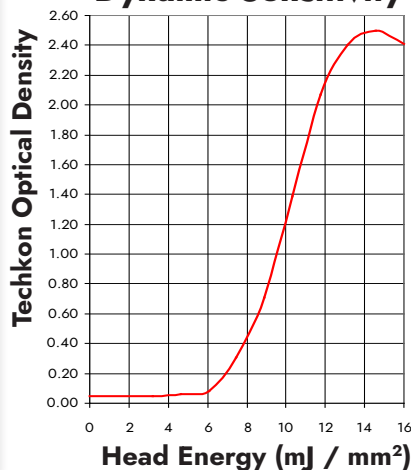

### Static Sensitivity

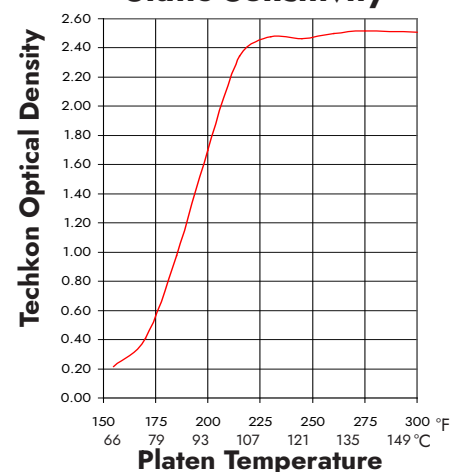

©2025 Appvion, LLC. Data is for reference only. May be subject to alterations. Use of Appvion's direct thermal products in processing, equipment, end-use, or other applications for which they were not intended voids all warranties.

Appvion, LLC · 825 East Wisconsin Avenue · Appleton, Wisconsin 54912 · (877) 768 – 8399 · [appvion.com](http://appvion.com)