

Résiste® 400 - 5.3

Entertainment Product



Résiste® 400-5.3 is an economical standard-caliper, standard-sensitivity topcoated direct thermal product designed for general-purpose applications.

Key Features

- Topcoated for high-resistance
- Standard-sensitivity delivering 200-dpi images
- Backcoated for superior press printing performance for high-impact graphics
- For use with picket fence barcodes only
- High-caliper for quality feel and stiffness



Applications

- Boarding passes/wallets
- Parking receipts/tickets
- Tollway tickets
- Car rental receipts/tickets
- Bin tags/industrial ticketing



Product Characteristics

Caliper	5.30 ± 0.30/135 ± 8
Basis Weight	
17 x 22–500 (lbs)	32.3 ± 2.6
g/m ²	121.3 ± 9.7
Thermal Response - Nominal	
Static (°C ± 5°)	
Initial 0.2 ODU	77° C
Functional 1.0 ODU	88° C
Maximum 1.88 ODU	135° C
Dynamic—Atlantek 400 (mJ/mm²)	
Initial 0.2 ODU	4.5
Functional 1.0 ODU	7.9
Maximum 1.89 ODU	14.6
Brightness (UV Excluded)	>80
Gurley Stiffness Nominal (mg)	MD 450 CD 225
Elmendorf Tear Nominal (g)	MD 95 CD 115
Tensile (lbs/in)	MD 44 CD 22
Parker Print Surface	<1.60

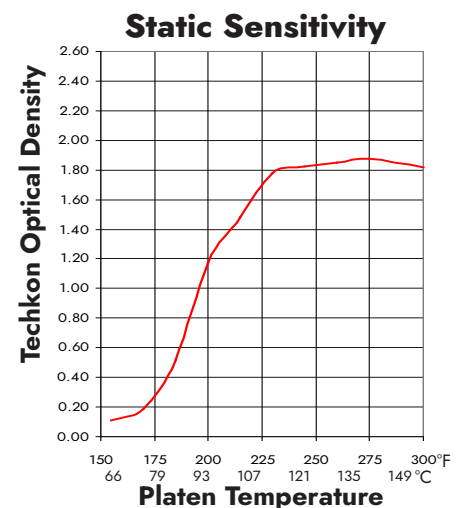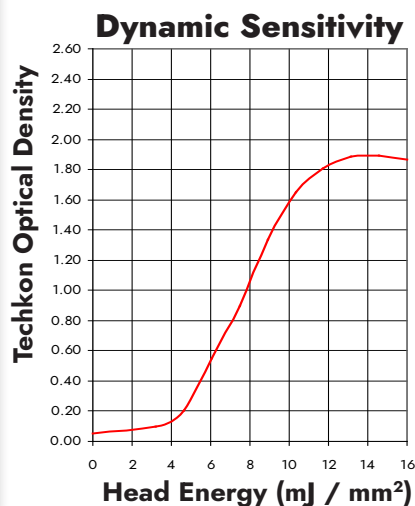

©2025 Appvion, LLC. Data is for reference only. May be subject to alterations. Use of Appvion's direct thermal products in processing, equipment, end-use, or other applications for which they were not intended voids all warranties.

Appvion, LLC · 825 East Wisconsin Avenue · Appleton, Wisconsin 54912 · (877) 768 – 8399 · appvion.com