

Résiste® 400 - 7.0

Entertainment Product



Résiste® 400-7.0 is an economical standard-caliper, standard-sensitivity topcoated direct thermal product designed for general-purpose applications. It is backside printable for basic one- or two-color images with excellent lay-flat characteristics.

Key Features

- Topcoated for high-resistance
- Unique backside treatment for excellent lay-flat characteristics
- Standard sensitivity delivering 200-dpi images
- Excellent resistance to high heat
- Ideal for one- or two-color backside images
- High caliper for quality feel and stiffness



Applications

- Parking spitter tickets
- Parking receipts
- Cinema tickets
- Bus/rail tickets



Product Characteristics

Caliper	7.10 ± 0.30/177.8 ± 8
Basis Weight	
17 x 22–500 (lbs)	44.2 ± 3.5
g/m ²	166 ± 13.3
Thermal Response - Nominal	
Static (°C ± 5°)	
Initial 0.2 ODU	87° C
Functional 1.0 ODU	104° C
Maximum 1.79 ODU	135° C
Dynamic—Atlantek 400 (mJ/mm²)	
Initial 0.2 ODU	6.2
Functional 1.0 ODU	9.9
Maximum 1.7 ODU	16.0
Brightness (UV Included)	>75
Gurley Stiffness Nominal (mg)	MD 1234 CD 575
Elmendorf Tear Nominal (g)	MD 115 CD 140
Tensile (lbs/in)	MD 73 CD 35
Parker Print Surface	<1.85

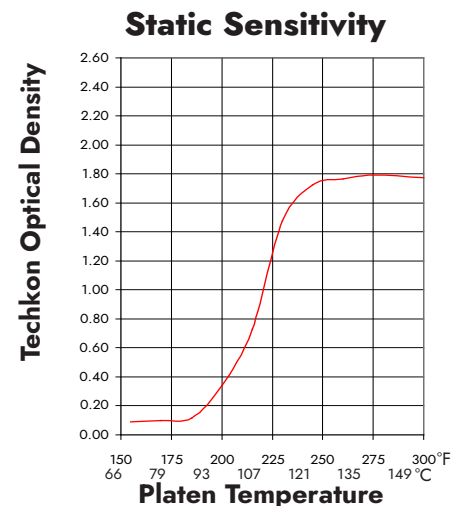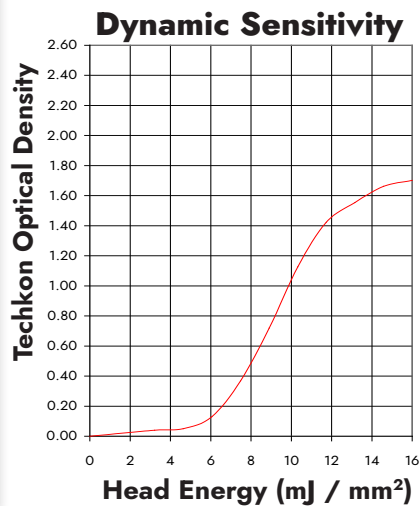

©2025 Appvion, LLC. Data is for reference only. May be subject to alterations. Use of Appvion's direct thermal products in processing, equipment, end-use, or other applications for which they were not intended voids all warranties.

Appvion, LLC · 825 East Wisconsin Avenue · Appleton, Wisconsin 54912 · (877) 768 – 8399 · appvion.com